

Project: **New Fire Station No. 1**
RFT# T-FD-22-01
Highlands Boulevard, Millbrook, ON

Date: June 10, 2022
Owner: Township of Cavan Monaghan
Greenview File: 164.21.005

This Addendum forms part of the Tender Documents and shall supersede all prior issued tender documentation and/or Addenda as noted, and specifically applicable.

This Addendum consists of 1 page(s), and 2 attachments.

- *Electrical Addendum E1 (June 9, 2022).*
- *Existing Gas Main Sounding Sketch.*

1. Project Manual:

- .1 Section 00 41 13 Tender Forms.
- .1 Appendix B – Unit Rates:
 - .1 Bidders to include the unit rate for asphalt paving in price per tonne. The Owner will consider a price adjustment as per the Ontario Ministry of Transportation (MTO) Asphalt Price Index, as applicable to the extent and timeline of this aspect of the work.
- .2 Section 01 11 00 Summary of Work.
 - .1 Part 1.11 Work by Owner, add .3:
 - .1 “During the period of construction, the Contractor shall be responsible for the protection of the natural gas main/piping existing along County Road 10 associated with its construction entrance off County Road 10, and on the project site. In accordance with Section 01 21 00 Allowances, the Contractor shall coordinate the relocation of the natural gas line in accordance with all requirements of authorities having jurisdiction.”
 - .2 Bidders are advised that the measured depth of the natural gas piping along County Road 10 are as per the attached sketch.

2. Drawings:

- .1 Electrical Drawings:
 - .1 Refer to attached Electrical Addendum E1.
- .2 Civil Drawing C101:
 - .1 Add Note: Soil Disposal Area indicated on drawing shall accept only topsoil, and earth soil materials for stockpiling. Grass, sod, brush, wood, stumps, or any other non-soil material shall not be deposited in the designated area, and shall be disposed off-site by the Contractor, at the Contractor’s cost.

End of Addendum 04

BERTHELOT ENGINEERING LTD.
2193 Lynhaven Rd, Peterborough, Ontario, Canada K9K 1W8
Tel: (705) 775-1517 email: pberthelot@bertheloteng.com

ELECTRICAL ADDENDUM #1

| | |
|------------------------------------|---|
| TO: Greenview Environmental | ELEC. ADDEN. No.: E1 |
| 13 Commerce Court | PROJECT No.: 473 |
| Bancroft, Ontario | PROJECT NAME: New Fire Station No. 1 |
| K0L | DATE: June 9, 2022 |


ATTENTION: Tyler Peters,

This addendum forms part of the contract documents and is to be read, interpreted, and coordinated with all other parts, and shall be issued by Greenview Environmental. The following items shall be added to the tendered price for this project:

General

1. The floor boxes in Training Room 107 shall be complete with 2 data outlets and 2 duplex receptacles, a product of CER, model number: CF9C-2- B.
2. The Hydro One offer to connect has not been completed yet. During meetings with Hydro One, we understand that primary cable shall be supplied and installed by contractor and terminated by Hydro One. Bid price shall include the price to supply and install primary cable. Item may be modified when offer comes in.
3. Contractor should visit site and determine the distance required to feed the water tower. The estimated length of conduit is 100m. This conduit shall be an empty conduit with pull cord to provide a path from the water tower interior room to radio room in fire hall.
4. The 400A, fusible, main service disconnect switch is 3 Ø, 4 wire, 120/208V.

REQUESTED BY: Paul Berthelot, P.Eng.

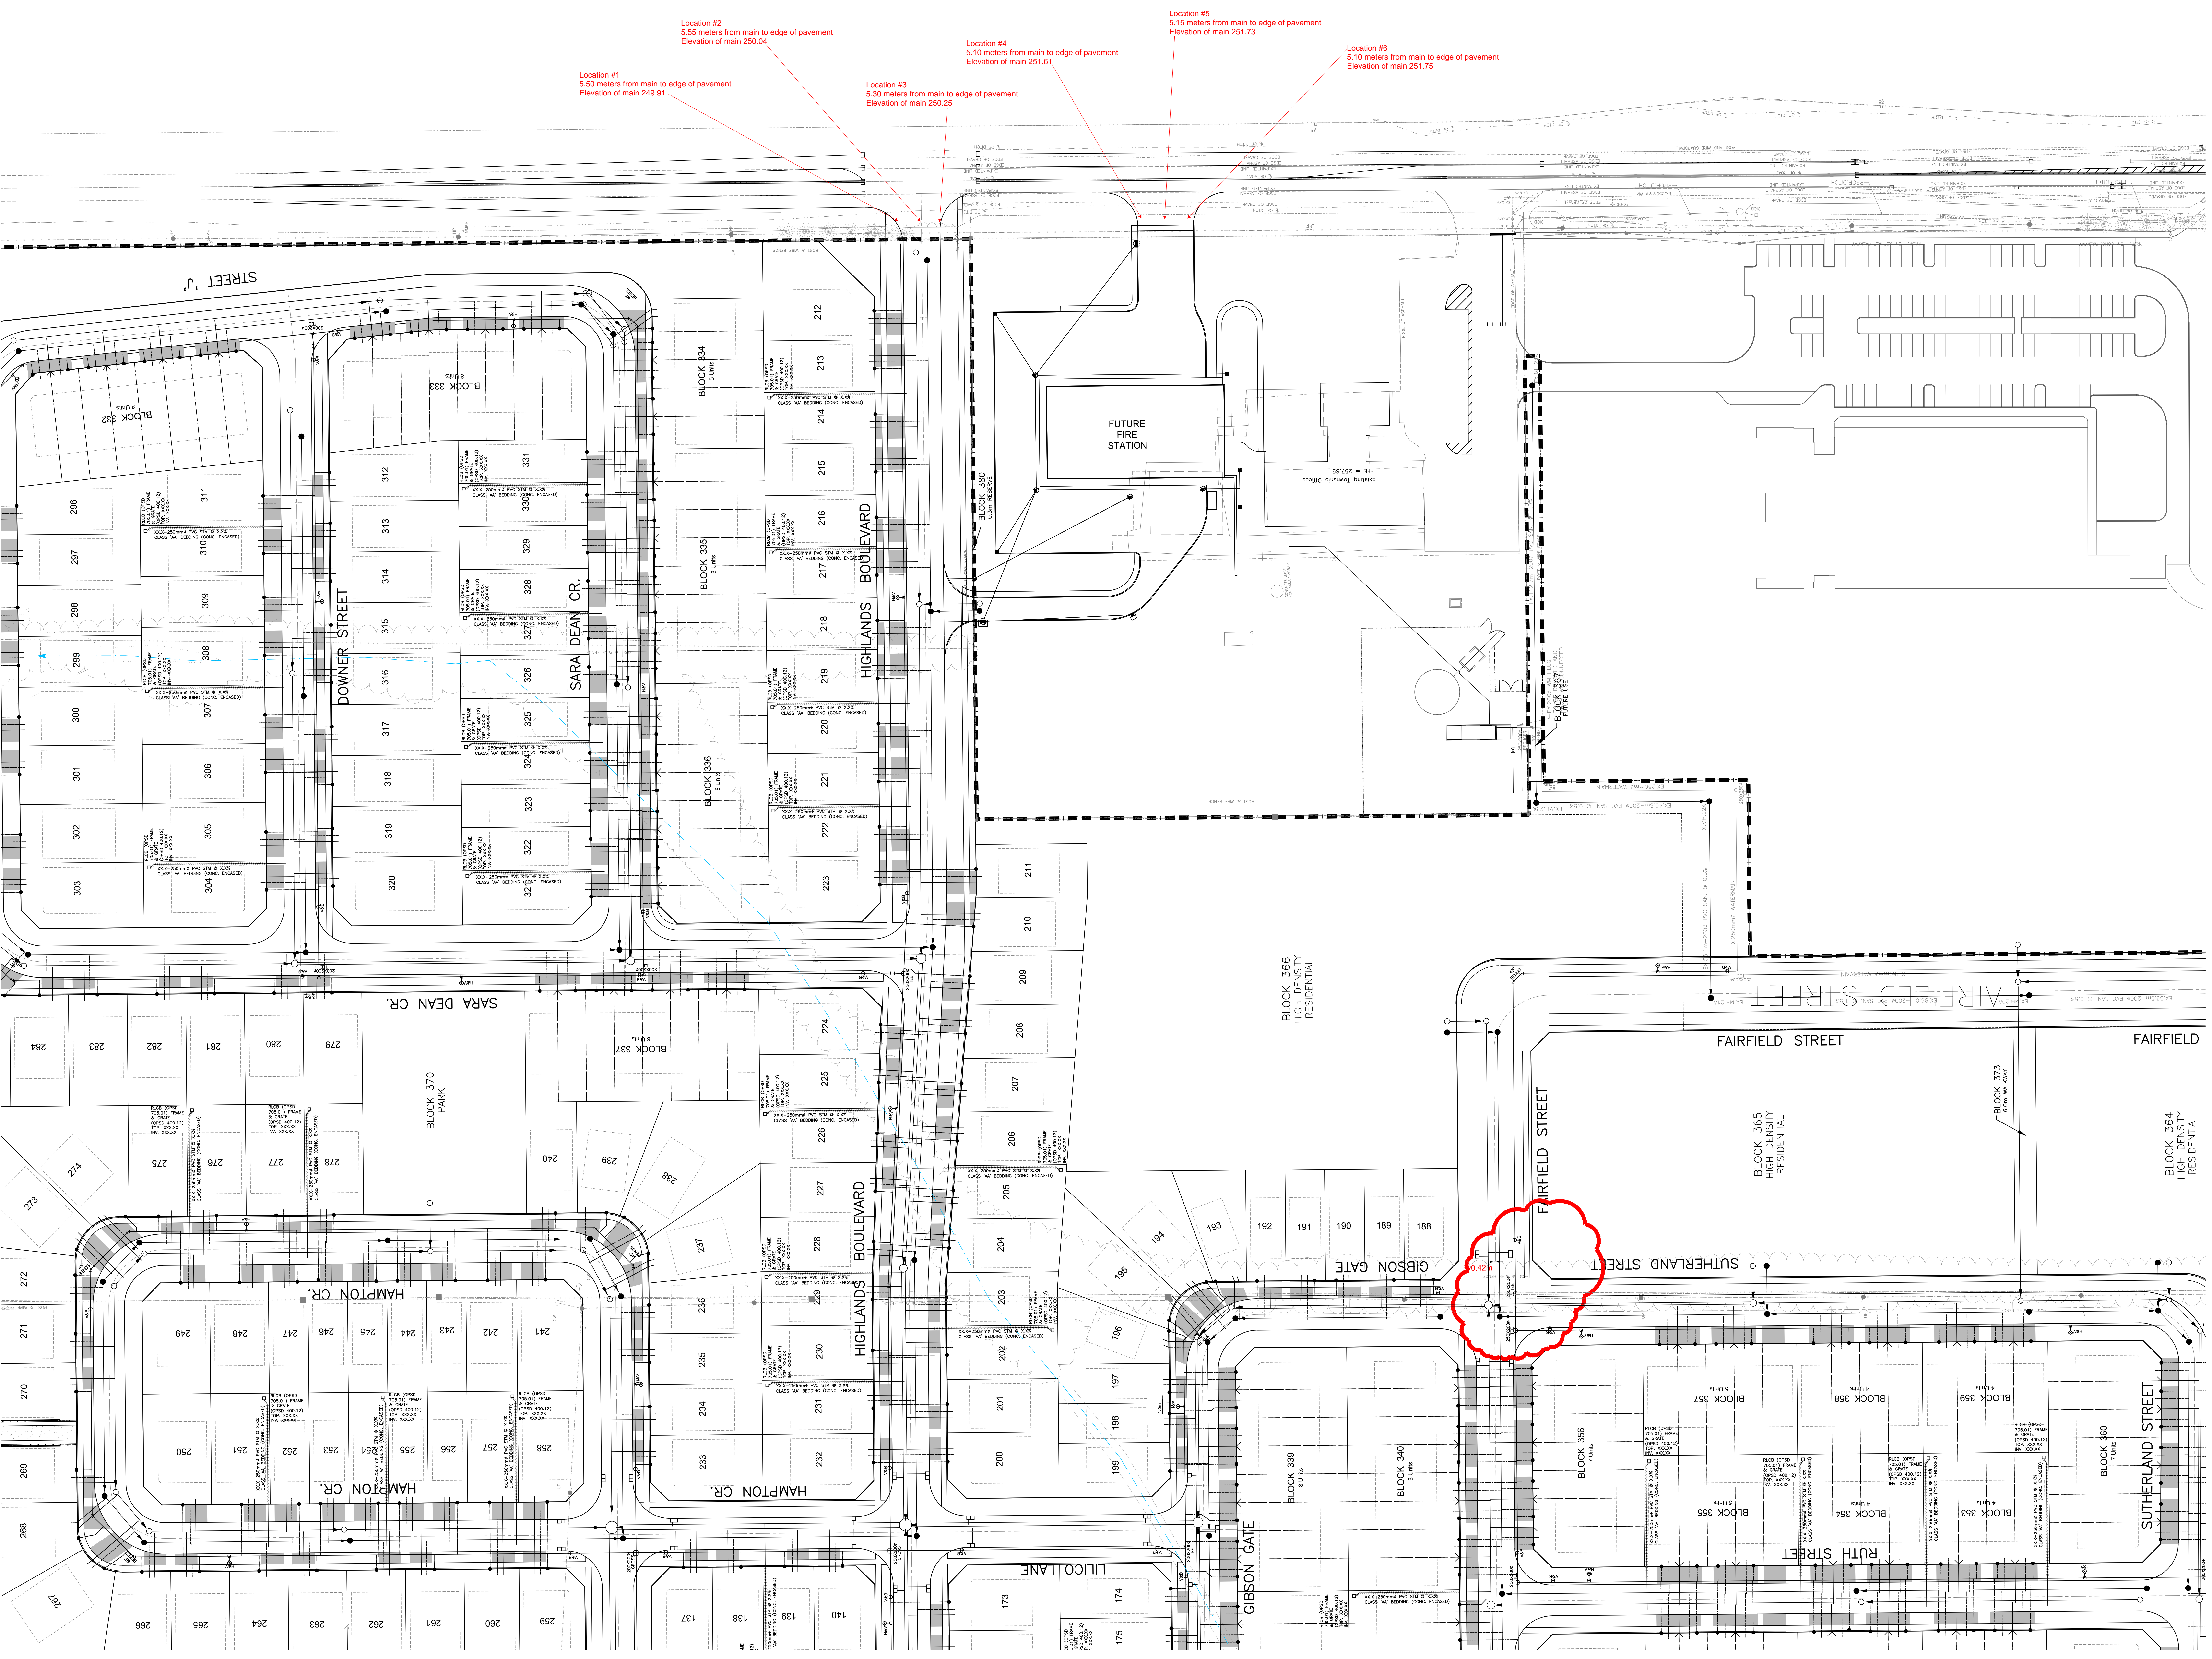

Location #2
5.55 meters from main to edge of pavement
Elevation of main 250.04

Location #4
5.10 meters from main to edge of pavement
Elevation of main 251.61

Location #5
5.15 meters from main to edge of pavement
Elevation of main 251.73

Location #6
5.10 meters from main to edge of pavement
Elevation of main 251.75

Location #1
5.50 meters from main to edge of pavement
Elevation of main 249.91

Location #3
5.30 meters from main to edge of pavement
Elevation of main 250.25