



2 PART-ENLARGED GROUND FLOOR CORRIDOR

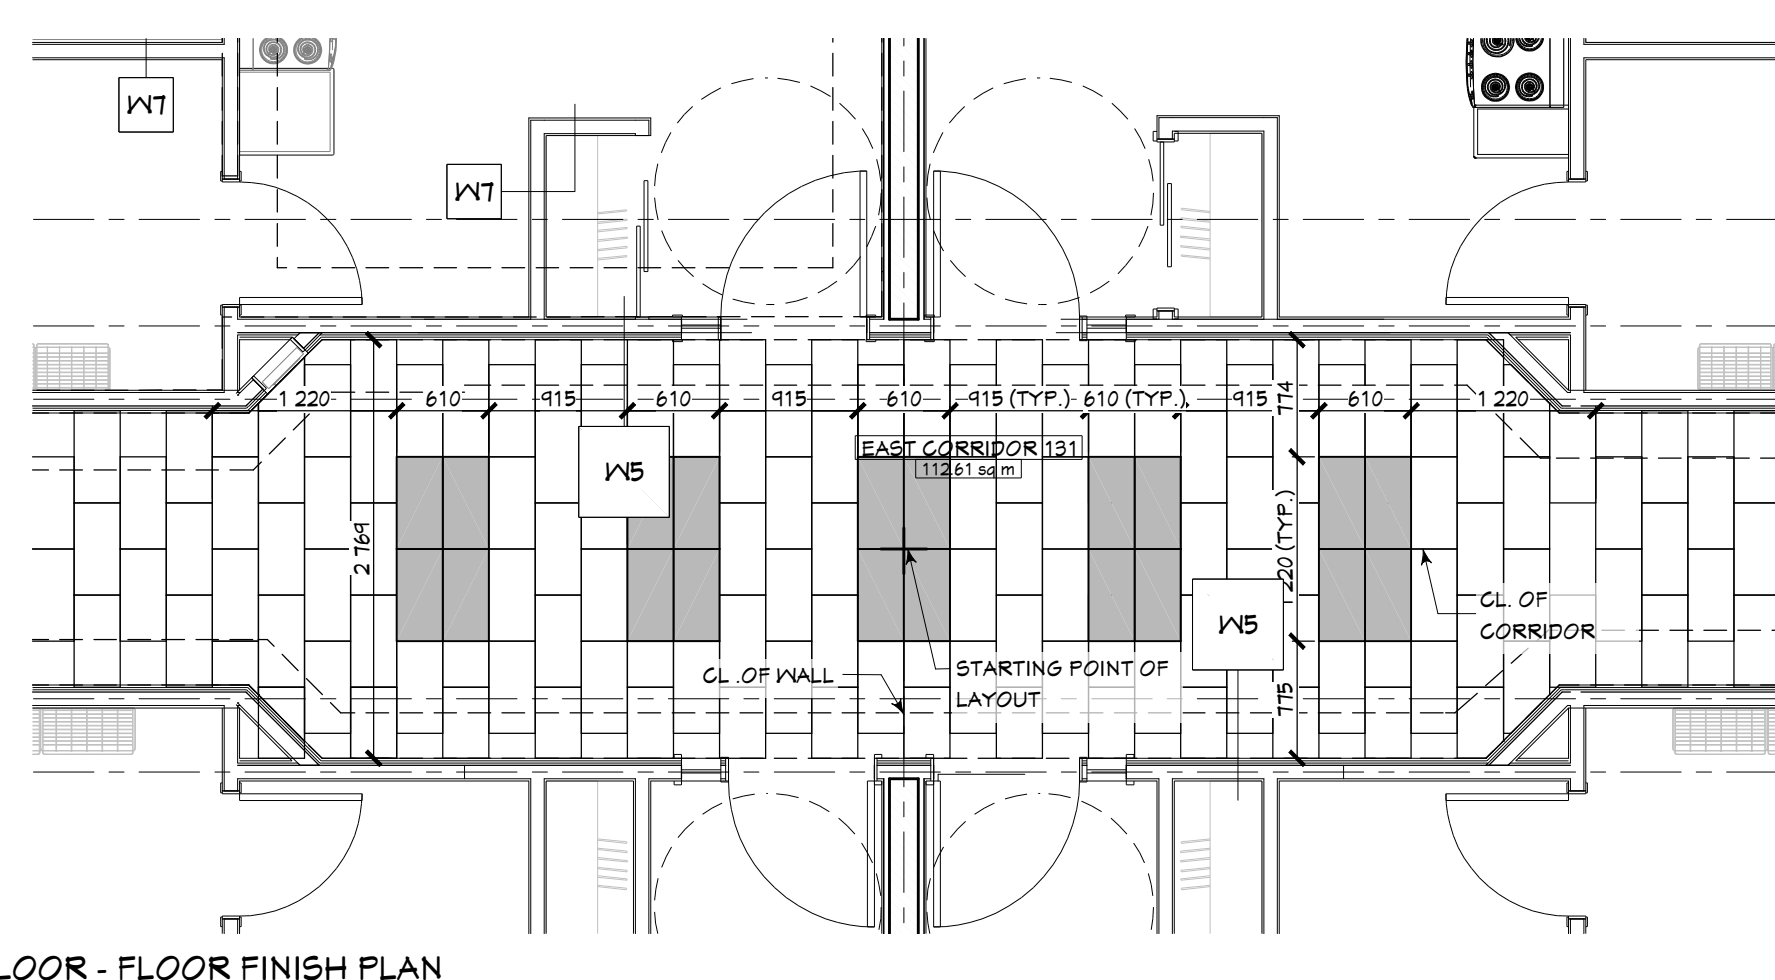

4 GROUND FLOOR - FLOOR FINISH PLAN

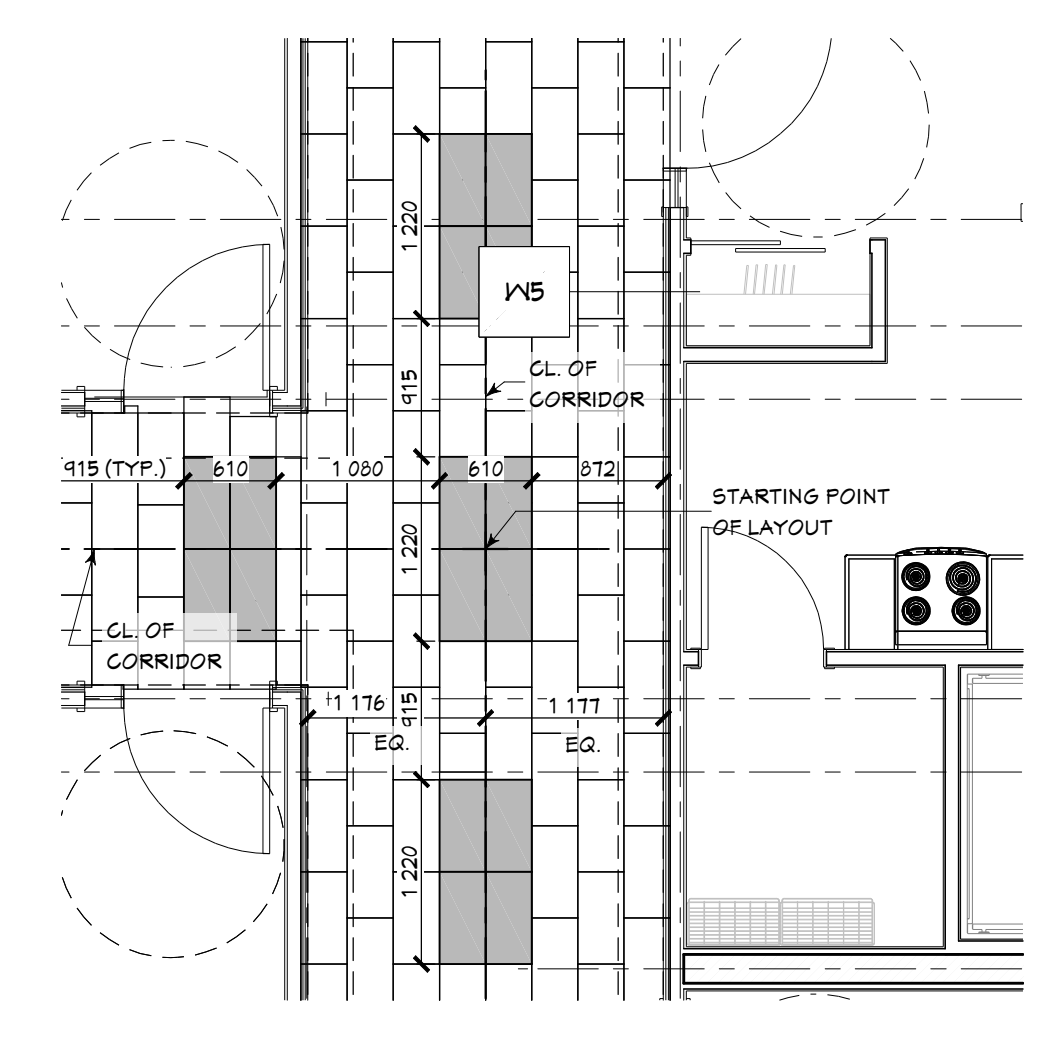


5 GROUND FLOOR - FLOOR FINISH PLAN

- LEGEND TO FLOOR FINISHES:**
- CT-1: CERAMIC / PORCELAIN TILE: OLYMPIA TILE-LOOF: COLOUR: GREY MATTE-12"(305mm) X24"(610mm) EXLP B05 1224MT (CORRIDOR AREA & SUITES AS SHOWN ON PLANS) GROUT TO BE 01 ALABASTER BY: MAPEI
 - CT-2: (SHOWER FLOOR) CERAMIC / PORCELAIN TILE: OLYMPIA TILE-QUEBEC SERIES UNGLAZED MOSAIC: MOTTLED GREY 2"(50mm) X2"(50mm) (SUITES ONLY) GROUT TO BE 02 PEPT
 - CT-3: (SHOWER WALLS) CERAMIC / PORCELAIN TILE: OLYMPIA TILE-TENDER GREY BRIGHT 4"(101mm) X16"(406mm) GTCD TGR0416BR (SUITES ONLY WALL TILE)
 - LVY-1: LUXURY VINYL: FELD COLOUR: TRAFFIX: PUTTY
 - LVY-2: LUXURY VINYL: ACCENT COLOUR: TRAFFIX: BISQUE (SHOWN AS SOLID GREY HATCH)
 - WPC: WOOD-PLASTIC COMPOSITE: VINYL PLANK 1.5mm THICK (1 1/4" X 45" PLANK SIZE): TRAFFIX COLOUR: DESERT CAMEL
 - VCT: VINYL COMPOSITE TILE: 12" (305mm) X 12" (305mm) V-220 CAST PEXTER BY: AZ ROCK COLLECTION
- REFER ALSO TO SPECIFICATIONS

CT-1 FINISH ON STAIR TREAD, RISERS, & LANDING CAN NON-SLIP NOSING WITH COLOUR CONTRAST ON EACH TREAD. REMAINDER OF STAIR, RAILINGS, GUARDS & HANDRAILS TO BE PAINT FINISH

3 PART-ENLARGED GROUND FLOOR CORRIDOR

REFER TO DRAWING SHEET A20 FOR SUITE FLOOR FINISH PLANS

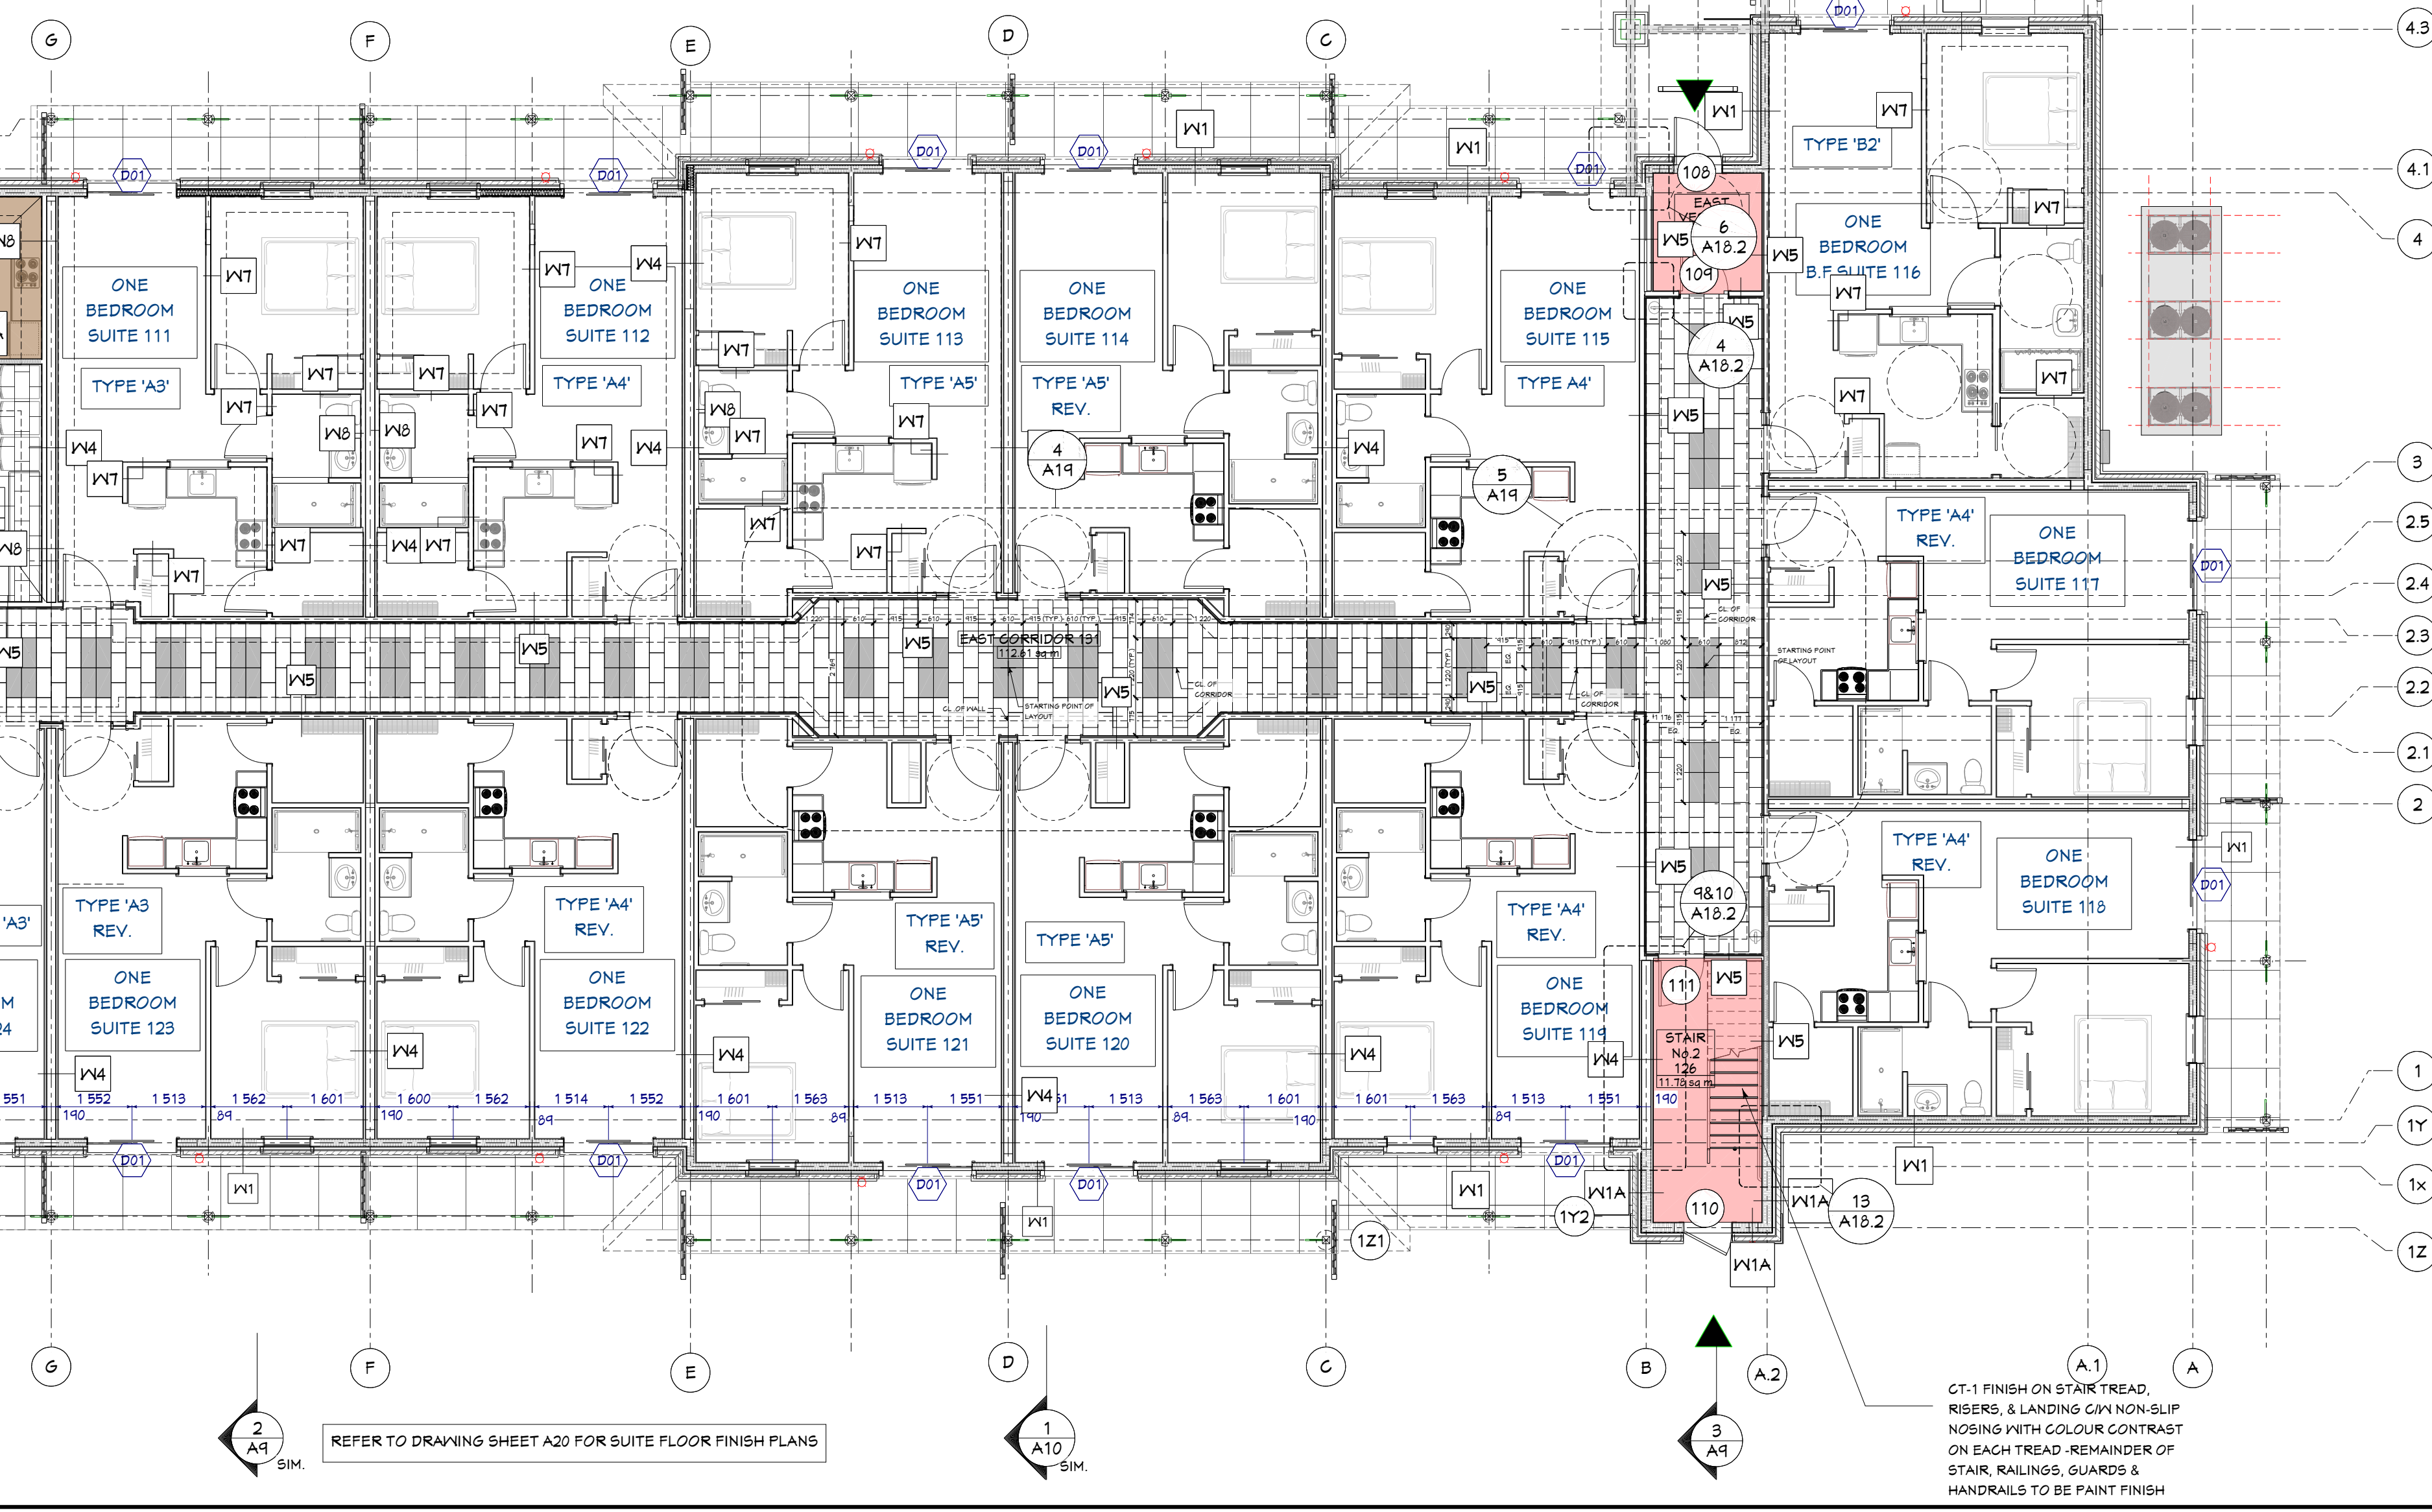

CT-1 FINISH ON STAIR TREAD, RISERS, & LANDING CAN NON-SLIP NOSING WITH COLOUR CONTRAST ON EACH TREAD. REMAINDER OF STAIR, RAILINGS, GUARDS & HANDRAILS TO BE PAINT FINISH

3	ISSUED FOR CONSTRUCTION	JAN. 3/19	GN
2	ISSUED FOR TENDER AND BUILDING PERMIT-TOWN OF BRCK	JULY 13/19	GN
1	ISSUED FOR REVIEW	JUNE 18/18	GN
NO.	REVISIONS	DATE	BY:
"ALL DRAWINGS, SPECIFICATIONS AND RELATED DOCUMENTS ARE THE COPYRIGHT PROPERTY OF THE ARCHITECT AND MUST BE RETURNED UPON REQUEST. REPRODUCTION OF DRAWINGS, SPECIFICATIONS AND RELATED DOCUMENTS IN PART OR WHOLE IS FORBIDDEN WITHOUT THE ARCHITECT'S WRITTEN PERMISSION." DRAWINGS SHALL NOT BE SCALED			
CONTRACTOR MUST CHECK AND VERIFY ALL DIMENSIONS ON THE JOB			
NATALE ARCHITECT INC. Suite 208 2448 Dundas St. West Mississauga, Ontario M5S 2C3 Tel: (416) 233-0207 Fax: (416) 233-0207			
ONTARIO ASSOCIATION OF ARCHITECTS LICENCE 4184 JAN 3/19			
PROJECT: NEW 2 STOREY BUILDING: SENIORS RESIDENCE 100 MCKAY STREET GANNINGTON, ONTARIO			
DRAWING: GROUND FLOOR - FLOOR FINISH PLAN			
THIS DRAWING SHALL NOT BE USED FOR CONSTRUCTION UNLESS COUNTERSIGNED BY:			
DRAWN BY: nm	CHECKED BY: GN		
DATE AUG. 2017	SCALE AS NOTED		
PROJECT No.	DRAWING No.		
16-16		A19	